


Ferrofix floor drain Sys 200, Waterproofing layer, Slot grt, SST OT

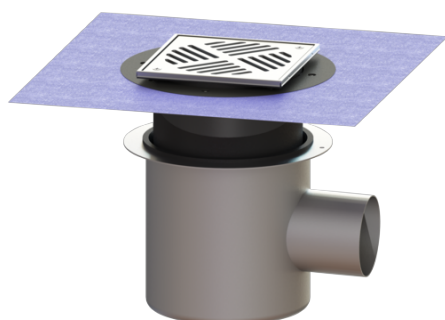

Article information

Item no.: 142026.52
 GTIN: 4026092006719
 Price group: 70

Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

Description

The Ferrofix stainless steel floor drain is used for point drainage and is equipped with a removable odour trap, a lip seal and a temporary protective cover.

The outlet socket is suitable for connection to SML cast iron pipes.

Version:

System:	200
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Connection flange
Sealing water height:	70 mm

General characteristics:

Nominal size (DN):	100
Standard:	EN 1253-1

Dimensions:

Length:	280 mm
Width:	280 mm

Tank:

Number of outlets:	1 ST
--------------------	------

Outlet nominal size (DN):	100
Outlet nominal size (OD):	110

Drain body:

Material of drain body:	Stainless steel 14301
Socket version:	lateral

Vertical adjustment:	vertically adjustable upper section
Vertical adjustment:	12 - 25 mm

Coverage features:

Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Load class:	L 15 (EN 1253-1)
Length:	200 mm
Width:	200 mm
Locking:	screwed

Grating:

Rim length:	200 mm
Rim width:	200 mm

Upper section material:	ABS
-------------------------	-----