


The Ultraflat 54 floor drain DN 50, enclWPM, Des grating, Lock&Lift

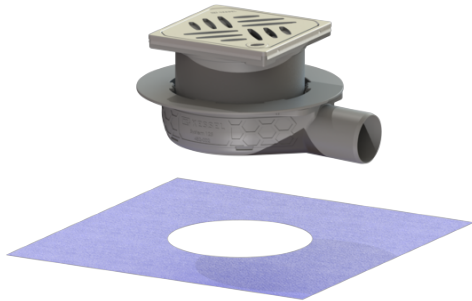

Article information

Item no.: 44750.63
GTIN: 4026092080870
Price group: 10

Advantages

- including removable odour trap in the upper section
- Low installation depth
- Scientifically confirmed sound insulation effect

Description

The Ultraflat 54 floor drain is suitable for indoor floor drainage. The polymer drain is equipped with a removable odour trap in the upper section.

Version:

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Seepage opening:	optional
Waterproofing layer on the drain body:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W2-I
Sealing water height:	22 mm

General characteristics:

Nominal size (DN):	50
Outer diameter (OD):	50

Dimensions:

Length:	246 mm
Width:	200 mm
Height:	54 mm

Tank:

Number of outlets: 1 ST

Drain body:

Material of drain body: ABS

Vertical adjustment: vertically adjustable upper section

Vertical adjustment: 70 - 121 mm

Coverage features:

Type of cover: Design cover

Grating design: Kessel

Cover material: 304 stainless steel

Colour of cover: silver

Load class: L 15 (EN 1253-1)

Length: 120 mm

Width: 120 mm

Height: 16 mm

Locking: Lock & Lift

Grating:

Rim length: 132 mm

Rim width: 132 mm

Rim material: 304 stainless steel

Upper section material: ABS