


## Shower channel Linearis Compact L: 1050 mm, DN 50, WaD, 304 SST cov., K 3

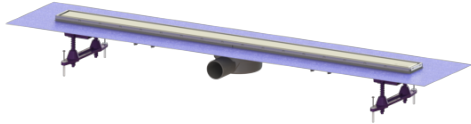

### Article information

Item no.: 45600.66M  
GTIN: 4026092078945  
Price group: 10

### Advantages

- Individual design with reversible stainless steel insert
- Highest fire protection standards
- Low installation depth

### Description

The Linearis Compact shower channel with welded on drain body made of ABS is suitable for indoor linear drainage. If inserted upside down, the stainless steel insert can be tiled individually. Including prepared seepage water openings and odour trap.

#### Version:

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Seepage opening:	prepared
Waterproofing layer on the upper section:	Factory-fitted sealing collar (WaD) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W3-I
Sealing water height:	22 mm

#### General characteristics:

Nominal size (DN):	50
Outer diameter (OD):	50

#### Dimensions:

Width:	191 mm
Height:	80 mm

null: 1,115 mm

#### **Tank:**

Number of outlets: 1 ST  
Installation depth: 80 mm

#### **Drain body:**

Material of drain body: ABS

#### **Coverage features:**

Type of cover: Stainless steel cover  
Grating design: optionally tileable  
Cover material: 304 stainless steel  
Colour of cover: silver, selectable  
Max. flooring height: 15 mm  
Load class: K 3 (EN 1253-1)  
Surface: Brushed SST  
Locking: placed

#### **Grating:**

Rim length: 1,050 mm  
Rim width: 66 mm  
Rim material: 304 stainless steel

Shape of upper section: square  
Upper section material: ABS  
Discharge rate (l/s) with 10 mm backwater: 0.6 l/s  
Discharge rate (l/s) with 20 mm backwater: 0.7 l/s  
Discharge rate (l/s) without backwater: 0.5 l/s