



Ferfix floor drain DN 70, vertical, Waterproofing layer, Slotted grating

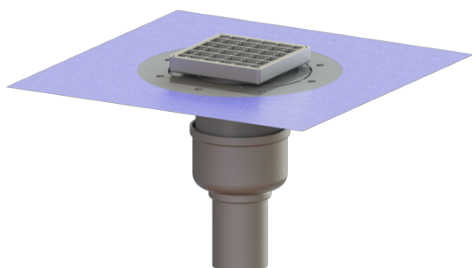

Article information

Item no.: 54410.21
GTIN: 4026092056387
Price group: 70

Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

Description

The Ferfix stainless steel floor drain is used for point drainage and is equipped with a removable odour trap made of stainless steel, a lip seal and a temporary protective cover.

The outlet socket is suitable for connection to SML cast iron pipes.

Version:

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Connection flange
Sealing water height:	50 mm

General characteristics:

Nominal size (DN):	70
Outer diameter (OD):	78
Standard:	EN 1253-1

Dimensions:

Length:	142 mm
Width:	142 mm

Tank:

Number of outlets:	1 ST
--------------------	------

Drain body:

Material of drain body:	Stainless steel 14301
Socket version:	vertical
Vertical adjustment:	vertically adjustable upper section
Vertical adjustment:	23 - 40 mm
Upper section:	adjustable in three dimensions

Coverage features:

Type of cover:	Slotted grating
Cover material:	Stainless steel 14301
Load class:	L 15 (EN 1253-1)
Length:	138 mm
Width:	138 mm
Surface:	pickled
Locking:	unlocked

Grating:

Rim length:	150 mm
Rim width:	150 mm
Shape of upper section:	square
Upper section material:	ABS