



Ferrofix floor drain DN 70, vert, Waterproofing layer, Slot grt

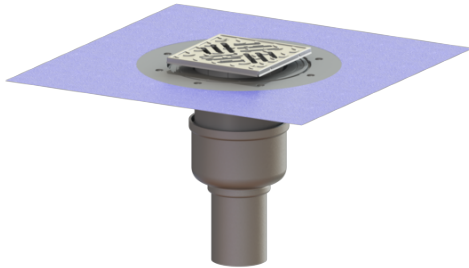

Article information

Item no.: 54410.52
GTIN: 4026092056301
Price group: 70

Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

Description

The Ferrofix stainless steel floor drain is used for point drainage and is equipped with a removable odour trap made of stainless steel, a lip seal and a temporary protective cover.

The outlet socket is suitable for connection to SML cast iron pipes.

Version:

| | |
|---|---|
| System: | 125 |
| Odour trap: | included |
| Type of waterproofing layer: | Waterproofing layer |
| Waterproofing layer on the upper section: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Waterproofing layer on the drain body: | Connection flange |
| Sealing water height: | 50 mm |

General characteristics:

| | |
|----------------------|-----------|
| Nominal size (DN): | 70 |
| Outer diameter (OD): | 78 |
| Standard: | EN 1253-1 |

Dimensions:

| | |
|---------|--------|
| Length: | 142 mm |
| Width: | 142 mm |

Tank:

| | |
|--------------------|------|
| Number of outlets: | 1 ST |
|--------------------|------|

Drain body:

| | |
|-------------------------|-------------------------------------|
| Material of drain body: | Stainless steel 14301 |
| Socket version: | vertical |
| Vertical adjustment: | vertically adjustable upper section |
| Vertical adjustment: | 10 - 18 mm |
| Upper section: | adjustable in three dimensions |

Coverage features:

| | |
|-----------------|-----------------------|
| Type of cover: | Slotted cover |
| Cover material: | Stainless steel 14301 |
| Load class: | L 15 (EN 1253-1) |
| Length: | 138 mm |
| Width: | 138 mm |
| Surface: | Polished SST |
| Locking: | screwed |

Grating:

| | |
|-------------------------|--------|
| Rim length: | 150 mm |
| Rim width: | 150 mm |
| Shape of upper section: | square |
| Upper section material: | ABS |