


Staufix clean out DN 150, Floor slab, tileable

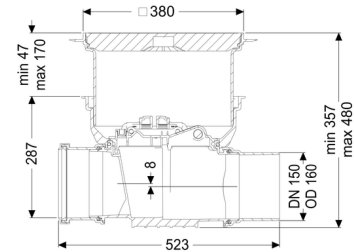

Article information

Item no.: 700150.10X
 GTIN: 4026092075968
 Price group: 10

Advantages

- Simple conversion to Staufix type 1
- Type 2 or StaufixControl
- Fast
- toolless access for cleaning
- Own gradient only 8 mm

Description

The clean out for faecal-free wastewater makes easy access to wastewater pipes possible for inspection and maintenance work.

Thanks to the modular KESSEL system, existing systems can easily be supplemented by up to two flaps and one emergency closure or be converted to the StaufixControl backwater valve.

Type of wastewater: wastewater without sewage
 Installation situation: floor slab installation

Version:

Type of waterproofing layer: Waterproofing layer
 Delivery state: Installation-ready (connection parts must be connected on site)

General characteristics:

Nominal size (DN): 150
 Outer diameter (OD): 160
 Colour: black

Dimensions:

Length:	523 mm
Width:	444 mm
Cutout dimension, length:	750 mm
Cutout dimension, width:	750 mm

Tank:

Installation depth:	341 - 464 mm
Groundwater resistant from lower edge of base section:	3.000 mm
Vertical adjustment:	vertically adjustable upper section

Coverage features:

Type of cover:	tileable cover plate
Cover material:	Polymer
Max. flooring height:	18 mm
Load class:	K 3 (EN 1253-1)
Length:	366 mm
Width:	366 mm
Tightness:	surface water resistant
Locking:	Lock & Lift
Vertical drop between inlet and outlet:	8 mm