


## Backwater valve Staufix DN 200, Floor slab, tileable, Type 2

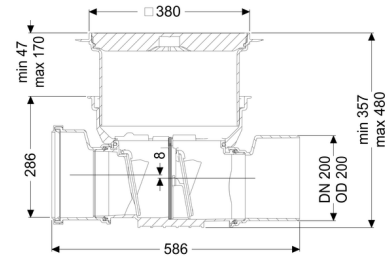

### Article information

Item no.: 730200.10X  
 GTIN: 4026092076569  
 Price group: 10

### Advantages

- Optional rat protection flap for additional safety
- Flexible installation, various covers available for floor slab installation
- Alternatively available as a module set

### Description

The backwater valve for wastewater without sewage is equipped with two mechanical flaps which close automatically in the event of backwater. One flap serves as an emergency closure to be closed by hand.

Thanks to the modular KESSEL system, existing systems can easily be converted to the StaufixControl backwater valve.

Type of wastewater:	wastewater without sewage
Installation situation:	floor slab installation

### Version:

Stainless steel flap as rat protection:	no
Type of waterproofing layer:	Waterproofing layer
Emergency closure:	yes
Delivery state:	Installation-ready (connection parts must be connected on site)
Backwater protection:	Type 2
Number of mechanical backwater flaps:	2

### General characteristics:

Nominal size (DN):	200
Outer diameter (OD):	200
Note on nominal size:	Hydraulics correspond to DN 150
Colour:	black
Standard:	EN 13564

#### Dimensions:

Length:	586 mm
Width:	444 mm
Cutout dimension, length:	750 mm
Cutout dimension, width:	750 mm

#### Tank:

Installation depth:	341 - 464 mm
Groundwater resistant from lower edge of base section:	3000 mm
Vertical adjustment:	vertically adjustable upper section

#### Coverage features:

Type of cover:	tileable cover plate
Cover material:	Polymer
Max. flooring height:	16 mm
Load class:	K 3 (EN 1253-1)
Length:	366 mm
Width:	366 mm
Tightness:	surface water resistant
Locking:	Lock & Lift
Vertical drop between inlet and outlet:	8 mm