
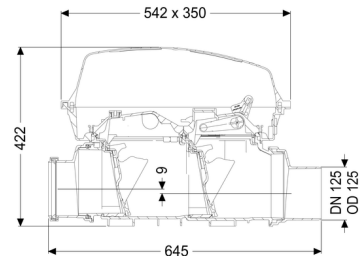


Backwater valve Staufix SWA DN 125, exposed

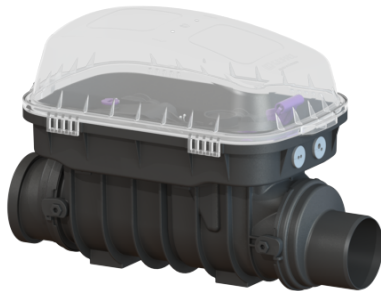

Article information

Item no.: 73125.10
 GTIN: 4026092003930
 Price group: 30

Advantages

- Simple conversion to Staufix FKA or Pumpfix F
- Fast, simple and toolless maintenance
- Available as a complete set or module set

Description

The premium backwater valve for wastewater without sewage is equipped with two mechanical flaps which close automatically in the event of backwater. One flap serves at the same time as an emergency closure to be closed by hand.

Thanks to the modular KESSEL system, existing systems can easily be converted to a Staufix FKA premium backwater valve or a Pumpfix F backwater pumping station.

Type of wastewater: wastewater without sewage
 Installation situation: exposed drainage pipe

Version:

Emergency closure: yes
 Delivery state: installation-ready
 Backwater protection: Type 2
 Number of mechanical backwater flaps: 2

General characteristics:

Nominal size (DN): 125
 Outer diameter (OD): 125
 Colour: black
 Standard: EN 13564

Dimensions:

Length:	645 mm
Width:	350 mm
Height:	422 mm

Drain body:

Socket version:	including spigot and socket
-----------------	-----------------------------

Coverage features:

Type of cover:	Protective cover
Cover material:	Polymer
Colour of cover:	transparent
Length:	542 mm
Width:	350 mm
Height:	165 mm
Locking:	Clip closure
Vertical drop between inlet and outlet:	9 mm