


## Backwater valve StaufixControl DN 200, exposed, Type 2 R

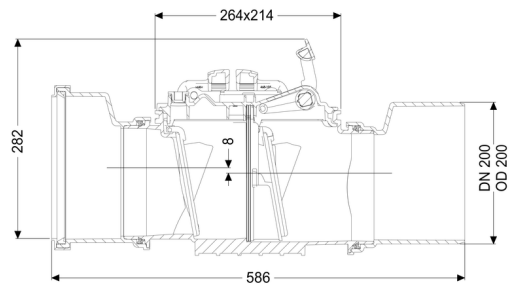

### Article information

Item no.: 770200R  
 GTIN: 4026092076866  
 Price group: 10

### Advantages

- optical and acoustic warning message if backwater occurs
- Wireless backwater signal (EnOcean) can be integrated in the control system
- Flexible installation, various covers available for floor slab installation

### Description

The backwater valve for wastewater without sewage is equipped with two mechanical flaps which close automatically in the event of backwater. One flap serves at the same time as an emergency closure to be closed by hand.

The battery-operated warning unit in the lockable cover generates an optical and acoustic warning if backwater occurs. Optionally, the warning message can control a remote signal generator in the living area via the EnOcean protocol or automatically disconnect a switched socket from the mains.

Type of wastewater: wastewater without sewage  
 Installation situation: exposed drainage pipe

### Version:

Stainless steel flap as rat protection:	yes
Emergency closure:	yes
Delivery state:	installation-ready
Backwater protection:	Type 2
Number of mechanical backwater flaps:	2

**General characteristics:**

Nominal size (DN):	200
Outer diameter (OD):	200
Note on nominal size:	Hydraulics correspond to DN 150
Colour:	black
Standard:	EN 13564

**Dimensions:**

Length:	586 mm
Width:	233 mm
Height:	306 mm

**Coverage features:**

Type of cover:	Lockable cover
Vertical drop between inlet and outlet:	8 mm

**Control:**

Type of level measurement:	pneumatic
Level measurement instrument:	Pressure switch
Cover locking:	One-handed closure