


## 3,0 kw Pump

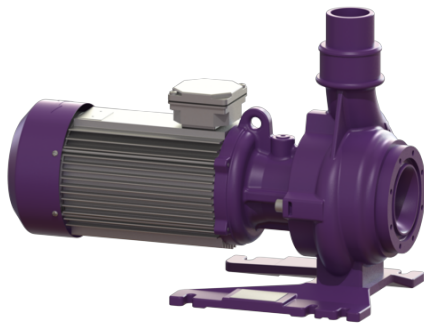

### Article information

Item no.: 917856  
GTIN: 4026092055823  
Price group: 90

### Description

#### Pumping device:

Pump:	SPF 300 KE 2.0
Max. pumping capacity:	60 m <sup>3</sup> /h
Max. pumping height:	17 m
Operating voltage:	400 V
Mains frequency:	50 Hz
Operating mode:	S2 - 30 min.
Power P1:	3.6 kW
Power P2:	3 kW
Speed:	2,850 U/min
Type of fuse required (electrical protection):	Fuse protection through control unit 400 V
Max. temperature (permanent) of conveyed material:	35 °C
Connection type:	Direct connection
Impeller type:	Radial impeller with macerating system
Length of mains cable for pump:	5 m
Rated current:	6.2 A
Protection class (pump):	IP 55
Protection class:	I
Type of pump connection cable:	H07RN-F 7G 1.5 mm <sup>2</sup>
Temperature monitoring:	integrated