
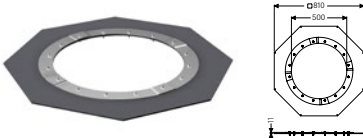
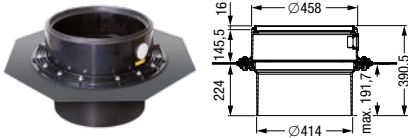
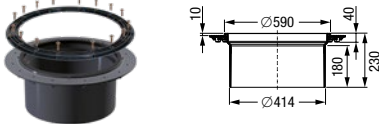




Accessories

Installation set		Outer diameter Ø (mm)	Art. no.
Installation set	<p>Compatibility: For installation in a concrete floor <i>Aqualift F Compact</i> and <i>Aqualift S Compact</i>; for installation in waterproof concrete</p> <p>Inclusive:</p> <ul style="list-style-type: none"> 1 Extension section with central flange 2 Pressure pipe set Ø 32: Art. no. 83 077 Ø 40: Art. no. 83 079 3 Adapter (Ø 75/Ø 110 socket) 4 Seal insert 5 Casing 6 Puddle flange (2) 	<p>Ø 32</p> <p>Ø 40</p>	<p>83 077</p> <p>83 079</p>
			
Sealing flange set			Art. no.
for sealing against water exerting pressure from outside	<p>Compatibility: Suitable for <i>Aqualift S Compact</i> lifting station for installation in the floor slab. Diameter of waterproofing membrane: 800 mm</p> <p>Inclusive: 4 mating flange segments as well as elastomeric waterproofing membrane made of NR/SBR and screws</p>		83 078
Extension sections			Art. no.
with centre flange	<p>Compatibility: For installation in a concrete floor <i>Aqualift F Compact</i> and <i>Aqualift S Compact</i></p> <p>Additional function: For installation in waterproof concrete</p> <p>Inclusive: Temporary construction debris cover, fully assembled, gasket set (counter flange made of polymer, screwed, elastomer sealing sheet made of NK/SBR Ø 800 mm)</p> <p>Extension: Max. 360 mm</p>		83 075
with flange and counter flange	<p>Compatibility: For installation in a concrete floor <i>Aqualift F Compact</i> and <i>Aqualift S Compact</i></p> <p>Additional function: For connection to an on-site sealing sheet</p> <p>Inclusive: Screws</p> <p>Extension: Max. 140 mm (In case of deeper installation ensure maintenance capability!)</p>		83 073
with gasket	<p>Compatibility: For installation in a concrete floor <i>Aqualift F Compact</i> and <i>Aqualift S Compact</i></p> <p>Extension: Max. 180 mm (In case of deeper installation ensure maintenance capability!)</p>		83 070
for deeper installation with flange	<p>Compatibility: For installation in a concrete floor <i>Minilift S</i> (280 570X, 280 570S, 280 570XC and 280 570SC)</p> <p>Inclusive: Gasket</p> <p>Extension: Max. 147 mm (In case of deeper installation ensure maintenance capability!)</p>		830 070
Pressure pipe set		Outer diameter Ø (mm)	Art. no.
Pressure pipe set	<p>Compatibility:</p> <p>Ø 40 / Ø 50: <i>Aqualift F Compact</i>, <i>Aqualift S Compact</i></p> <p>Ø 40: <i>Minilift S</i> (280 570X, 280 570S, 280 570XC and 280 570SC)</p> <p>Inclusive: 5 m pressure pipe hose</p> <p>Ø 40 (DN 32 mm)</p> <p>Ø 50 (DN 40 mm)</p>	<p>Ø 40</p> <p>Ø 50</p>	<p>28 040</p> <p>28 062</p>
