

Backwater valve *Drehfix*

The compact drain for renovation.

The *Drehfix* is a basement drain with integrated, removable backwater valve (Type 5). In addition, it protects connected discharge points such as washbasins, showers or washing machines against wastewater from the sewer. With odour trap, sludge bucket, manually locked emergency closure and a discharge rate of 1.8 l/s, it can be used flexibly and is so compact that it fits in the recesses of old cast iron drains. It is therefore ideally suitable for renovation projects.



1 Drain 2 Inlet

Backwater valve *Drehfix*

For installation in a concrete floor/slab



CE EN 13564 Type 5

Made in ABS. With lateral outlet 2.5°, with/without removeable twin flap backwater valve and emergency closure which can be locked by hand, odour trap and sludge trap and integrated, height adjustable upper section.


Drainage capacity 1.8 l/sec flow rate.

Sealing water height 60 mm.

Installation area 320 × 190 mm

Cover:

Slotted cover 150 × 190 mm made of polymer, black, with Easy Entry Function, class K 3

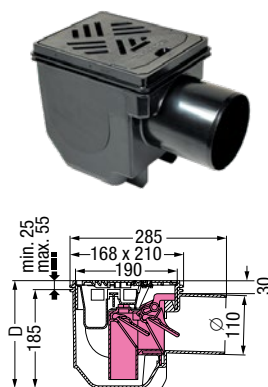

Outer diameter Ø (mm)	Installation depth D in mm	Art. no.
With twin flap backwater valve according to EN 13564 Type 5		
Ø 110	210 - 240	27 301
Without twin flap backwater valve		
Ø 110	210 - 240	33 101

➤ **Accessories:** pages 296 – 300