

Gutter drain

Lateral or vertical outlet

Made in polymer. Rain inlet cover with protective pipe made of polymer.
 With removable bell-shaped odour trap, two extension sections, sludge trap.
 With wall securing bracket.
 Drainage capacity 2.8 l/sec flow rate,
Note: For frost-free depth 545 mm

System 200



Illustration shows Art. no. 67 970

Outer diameter Ø (mm) Art. no.

Lateral outlet

Ø 110 67 970

Vertical outlet

Ø 110 67 960

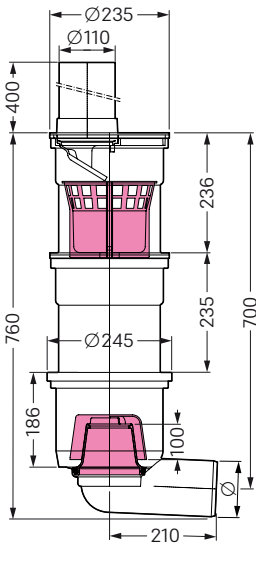


Illustration shows Art. no. 67 970

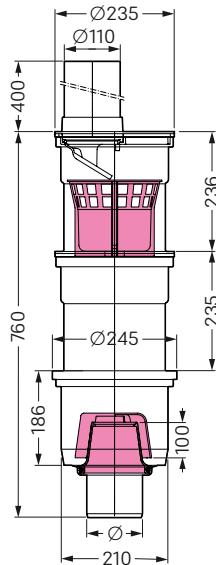


Illustration shows Art. no. 67 960

Gutter drain

Lateral or vertical outlet

Made in polymer. Rain inlet cover with protective pipe in synthetic material.
 With sludge trap.
 With/without wall securing device.
 Drainage capacity 4.5 l/sec flow rate

System 200



Illustration shows Art. no. 67 945

Lateral outlet

Outer diameter Ø (mm) Art. no.

With wall securing device

Ø 110 67 945

Vertical outlet

Outer diameter Ø (mm) Art. no.

With wall securing device

Ø 110 67 940

Without wall securing device

Ø 110 67 997




Illustration shows Art. no. 67 945




Illustration shows Art. no. 67 940