## 5.1

# **Accessories**

Grease separators for free-standing installation

#### Sampling chamber Ø 400


#### **Outlet lateral**

Compatibility: For connection to outlet pipe of separator, no ponding (allows accurate samples). Inlet and outlet  $\emptyset \dots$  available options for synthetic material pipes in: PE-HD (according to EN 1519-1); PVC-HT, PP or AS; for grease separators for freestanding installation

Inclusive: Cover sealed odour-tight with snap closure

Drop height: 120 mm





Ø (mm)	in mm	Art. no.
Ø 110/Ø 160	750	915 871
Ø 200	780	915 883
Ø 250	860	915 884

915 870

Outer diameter

Ø 110/Ø 160

**Outer diameter** 

**Outer diameter** 

Ø (mm)

5.1 Grease separators

**Outlet vertical** 

Compatibility: For connection to outlet pipe of separator, no ponding (allows accurate samples). Inlet and outlet Ø ... available options for synthetic material pipes in: PE-HD (according to EN 1519-1); PVC-HT, PP or AS; for grease separators for freestanding installation

Inclusive: Cover sealed odour-tight with snap closure

Drop height: 120 mm






### Sampling chamber Ø 450

#### **Outlet lateral**

Compatibility: For connection to outlet pipe of separator. Inlet and outlet Ø 200 mm available options for synthetic material pipes in: PE-HD (according to EN 1519-1); PVC-HT, PP or AS; for grease separators for free-standing installation Inclusive: Cover sealed odour-tight with snap closure Drop height: 160 mm





Ø (mm)	Art. no.	
Ø 200	915 863-IS	


# **Distribution box**

Distribution box

Compatibility: For twin (parallel) separator systems; for grease separators for freestanding installation

Inclusive: With inlet and outlet connection for polymer pipes made of: PE-HD (according to DIN 19537); PVC-HT, PP or AS.



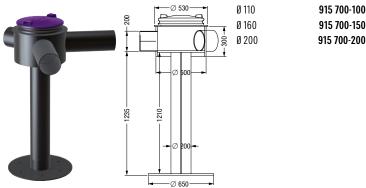

# Automated water refill EasyFill

Art. no. 919 010

Art. no.

**Automated water refill EasyFill** 

Compatibility: For grease separator EasyClean Standard, Direct, Mix, Mix & Pump according to EN 1825

