


## Accessories

Grease separators for underground installation

### Direct disposal, without disposal chamber

**Disposal connection**  
right or left

**Compatibility:** Installed in the ground with direct disposal connection; for grease separators for underground installation according to EN 1825  
**Inclusive:** Flange connection Ø 65, PN 10 (welded collar and loose flange) for the suction pipe on site, with Storz-B coupling R 2 1/2" for disposal vehicle, for nominal sizes NS 1 - NS 35  
**Delivery:** Installed suction device for the joint disposal from sludge trap and separating chamber, tank and direct connection completely assembled, disposal pipe and Storz-B connection on site.  
**Note:** Further installation depths, sizes and connections on request

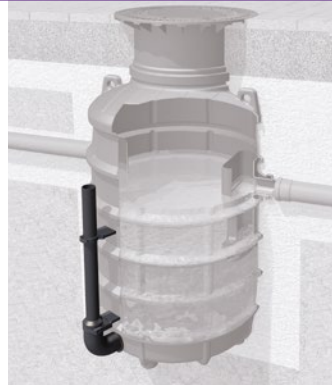

Disposal connection	Art. no.
right	917 419.00
left	917 419.50

### Disposal chamber Ø 400

**Disposal chamber**

**Compatibility:** For separator systems Auto Mix & Pump, Auto Mix and Mix for installation in the ground  
**Material:** Polyethylene, watertight  
**Installation depth:** 710 - 1080 mm  
**Inclusive:** With telescopic, height-adjustable upper section made of polymer with clamping ring, cover class A/B, D in accordance with EN 124 made of cast iron, sealed odour-tight, incl. lift-out key, with Storz-B coupling R 2 1/2" for disposal vehicle. Pressure pipe connection between separator and disposal chamber provided on-site.



Cover	Art. no.
Class A/B	917 422B
Class D	917 422D

### Joint and connection set

**Joint and connection set**

**Material:** Polyethylene  
**Compatibility:** For connection of the grease separator (NS 1 - NS 20) to the technical chamber for the versions grease separators Auto Mix & Pump, Auto Mix and Mix in ground installation  
**Inclusive:** Storz-B coupling, pipe clamps




Art. no.
917 421

### Direct disposal, including disposal chamber Ø 400

**Disposal connection**  
right or left

**Compatibility:** Installed in the ground with direct disposal connection for nominal sizes NS 1 - NS 35; for grease separators for underground installation according to EN 1825  
**Installation depth:** 630 - 980 mm  
**Inclusive:** Flange connection Ø 65, PN 10 (welded collar and loose flange) for the suction pipe on site, with Storz-B coupling R 2 1/2" for disposal vehicle, with chamber system Ø = 400 mm, incl. cover class A/B/D, sealed  
**Delivery:** Installed suction device for the joint disposal from sludge trap and separating chamber, tank and direct connection completely assembled, disposal pipe on site.  
**Note:** Further installation depths, sizes and connections on request



Disposal connection	Art. no.
right	917 420.00
left	917 420.50

Direct disposal

Disposal chamber Ø 400