

Sediment separator *EasySink* ground Ø 400 NS 1 – 2

for underground installation



KESSEL factory standard

Made of polyethylene

Consisting of:

With removable sediment container (hole diameter 5 mm), outlet odour trap. Vertically adjustable upper section with cover class A / B / D, odour-tight seal.

Inlet / outlet Ø 110 for plastic adapter DIN 19534;

Delivery scope:

NS 1: 1 sediment container (12 l) removable

NS 2: 1 sediment container (12 l) + 1 sediment container (20 l)

both are removable


Delivery: System completely assembled

Options: Inlet / outlet Ø = 40, 50, 75 mm

Stainless steel sediment containers with hole diameter:

3, 6, 8, 10, 12, 15 mm

Optional fine filter (mesh width 1.0 mm)

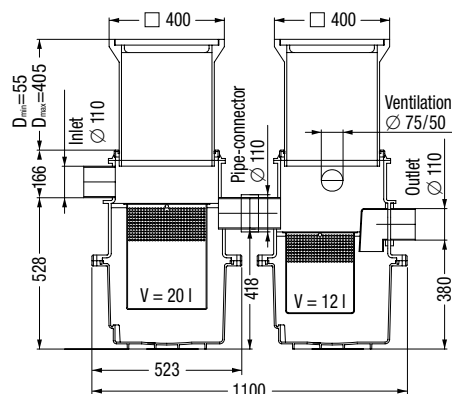

NS	Weight in kg	Art. no.
Cover class A		
NS 1	25	97 201/00A
NS 2	45	97 202/00A
Cover class B		
NS 1	25	97 201/00B
NS 2	45	97 202/00B
Cover class D		
NS 1	25	97 201/00D
NS 2	45	97 202/00D