


## Lifting station Aqualift F Compact Mono, SPZ 1000-S3, Floor sl., tileable

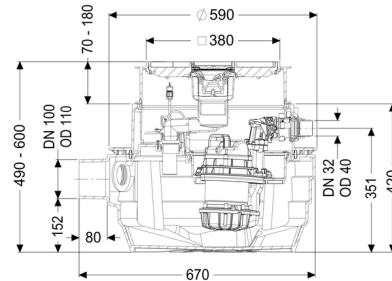

### Article information

Item no.: 28701X  
GTIN: 4026092093382  
Price group: 20

### Advantages

- Suitable for complete basement drainage
- Integrated drainage function when installed in the floor slab
- Maximum operating reliability due to intelligent control unit (Duo)

### Description

The lifting station for faecal and faecal-free wastewater is equipped with a submersible pump and a backflow preventer. The collection tank made of permanently resistant polymer (PE) has an enclosed pump tank. One-handed closures enable easy removal of the integrated components.

The station is controlled by a user-friendly control unit, which is optionally integrated in the building management system via a potential-free contact or alarm and collective fault messages that can be output via a GSM interface.

Type of wastewater: wastewater with sewage  
Installation situation: floor slab installation

### Version:

Type of system:	Single station
Shut-off valve:	without shut-off valve
Odour trap:	Multistop
Type of waterproofing layer:	Waterproofing layer
Pump control:	Control unit
Backflow preventer:	integrated

Delivery state:	Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected)
-----------------	--

#### General characteristics:

Colour:	black
Approval:	Z-53.2-484

#### Dimensions:

Length:	670 mm
Width:	590 mm
Cutout dimension, length:	800 mm
Cutout dimension, width:	800 mm

#### Tank:

Number of inlets:	1 ST
Inlet nominal size (DN):	100
Inlet nominal size (OD):	110 mm
Distance pipe bottom inlet to tank bottom:	152 mm
Distance from centre of outlet pipe to tank bottom:	351 mm
Distance from centre of inlet pipe to tank bottom:	207 mm
Connection conduit pipe (DN):	50 mm
Tank volume:	40 l
Pumping volume:	20 l
Pressure pipe connection:	horizontal
Pressure pipe connection (DN):	32 mm
Pressure pipe connection (OD):	40 mm
Installation depth:	490 - 600 mm
Venting connection (DN):	70 mm
Groundwater resistant from lower edge of base section:	3,000 mm
Vertical adjustment:	vertically adjustable upper section

#### Coverage features:

Type of cover:	tileable cover plate
Cover material:	Polymer
Drainage function:	yes
Max. flooring height:	16 mm
Length:	366 mm

Width:	366 mm
Locking:	Lock & Lift

### Pumping device:

Pump:	SPZ 1000
Number of pumps:	1
Max. pumping capacity:	11.5 m <sup>3</sup> /h
Max. pumping height:	10 m
Operating voltage:	230 V
Mains frequency:	50 Hz
Operating mode:	S3 - 50 %
Power P1:	1.2 kW
Power P2:	0.69 kW
Speed:	2,800 U/min
Type of fuse required (electrical protection):	Fuse protection through control unit 230 V
Max. temperature (permanent) of conveyed material:	40 °C
Connection type:	coded plug
Weight:	10 kg
Impeller type:	Macerator
Length of mains cable for pump:	5 m
Rated current:	5.2 A
Protection class (pump):	IP 68
Protection class:	I
Type of pump connection cable:	H07RN-F 3G 1.0 mm <sup>2</sup>
Temperature monitoring:	integrated
Cos phi - power factor:	0.97
Insulation class:	F

### Control:

Control unit:	Comfort
Operating voltage:	230 V
Mains frequency:	50 Hz
Self-diagnosis system (SDS):	yes
Battery buffering:	yes
Multi-line display:	yes
Log book function:	yes
USB interface:	yes
GSM interface:	yes
Potential-free contact:	optional
Type of fuse required (electrical protection):	C 16 A
Motor protection switch:	yes
Protection class control unit:	IP 54
Length of mains cable for control unit:	1.4 m
Type of level measurement:	pneumatic
Level measurement instrument:	Immersion pipe
Alarm sensor:	optical probe

