
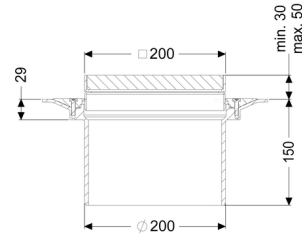


## Variofix upper section System 200, Slotted grating, 304 SST, L 15

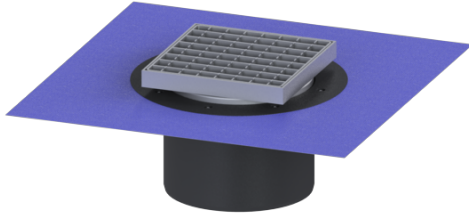

### Article information

Item no.: 48969  
 GTIN: 4026092005132  
 Price group: 70

### Advantages

- Different covers selectable
- Including waterproofing membrane

### Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

### Version:

|  |   |
|--|---|
| System:  | 200   |
| Type of waterproofing layer:   | Waterproofing layer   |
| Waterproofing layer on the upper section:                                | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W3-I  |

### Dimensions:

|                      |                                     |
|----------------------|-------------------------------------|
| Height:              | 150 mm                              |
| Diameter:            | 320 mm                              |
| Vertical adjustment: | vertically adjustable upper section |
| Vertical adjustment: | 30 - 50 mm                          |
| Upper section:       | adjustable in three dimensions      |

**Coverage features:**

|                  |                     |
|------------------|---------------------|
| Type of cover:   | Slotted grating     |
| Cover material:  | 304 stainless steel |
| Colour of cover: | silver              |
| Load class:      | L 15 (EN 1253-1)    |
| Height:          | 28 mm               |
| Surface:         | pickled, anti-slip  |
| Locking:         | placed              |
| Mesh size:       | 23 x 23 mm          |

**Grating:**

|                         |        |
|-------------------------|--------|
| Rim length:             | 200 mm |
| Rim width:              | 200 mm |
| Shape of upper section: | square |
| Upper section material: | ABS    |